

NE4040-SRM

Special grade NF element to selectively remove sulfate ions present in seawater

CSM®

SPECIFICATIONS:


General Features	Permeate flow rate¹:	1,600 GPD (6.1 m ³ /day)
	Permeate flow rate²:	1,500 GPD (5.7 m ³ /day)
	MgSO₄ rejection¹:	99.5%
	Nominal sulfate ion rejection (SO₄²⁻):	99.5%
	Effective membrane area:	85 ft ² (7.9 m ²)

- The stated product performance is based on data taken after 30 minutes of operation at the following divalent test conditions:
 - **2,000 mg/L MgSO₄ solution at 75 psig (0.52 MPa) applied pressure**
 - **15% recovery**
 - **77 °F (25 °C)**
 - **pH 6.5–7.0**
- The stated product performance is based on data taken after 30 minutes of operation at the following test conditions:
 - **35,000 mg/L Standard seawater solution at 200 psig (1.38 MPa) applied pressure**
(10,900 mg/L Na⁺, 390 mg/L K⁺, 410 mg/L Ca²⁺, 1,310 mg/L Mg²⁺, 19,700 mg/L Cl⁻, 2,740 mg/L SO₄²⁻)
 - **15% recovery**
 - **77 °F (25 °C)**
 - **pH 7.5 – 8.5**
- Minimum SO₄²⁻ ion rejection is 99.0%.
- Permeate flow rate for each element may vary + 25 % / - 10 %.
- Elements are supplied as dry-type. Dry elements are sealed in a poly bag and individually boxed.

Membrane type:	Thin-Film Composite
Membrane material:	Polyamide (PA)
Element configuration:	Spiral-Wound, FRP Wrapping

Dimensions

Model Name	A	B	C	D/E	Part Number	
					Inter-connector	Brine Seal
RE4040-SRM	40.0 inch (1,016 mm)	3.9 inch (99 mm)	0.75 inch (19.1 mm)	1.05 inch (26.7 mm)	SWA01050	SWA01046

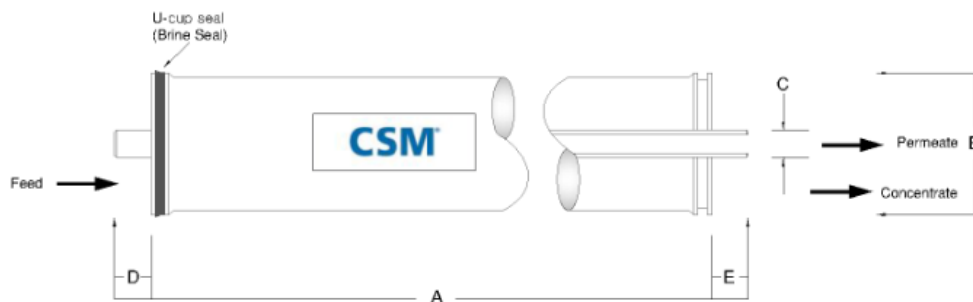

- Each membrane element supplied with one brine seal, one interconnector (coupler) and four o-rings.
- All NE4040 elements fit nominal 4.0 inch (101.6 mm) I.D. pressure vessels.

The information provided in this document is solely for informative purposes. It is the user's responsibility to ensure the appropriate usage of this product. Toray Advanced Materials Korea Inc. assumes no obligation, liability or damages incurred for the misuse of the product or for the information provided in this document. This document does not express or imply any warranty as to the merchantability or fitness of the product.

Toray Advanced Materials Korea Inc.

For more information on our products, company and regional contacts, please visit our website at www.csmfilter.com.

Product Specification Sheet / Model NE 4040-SRM

Page 1 of 2

Rev. 2.0 April 2021

NE4040-SRM

Special grade NF element to selectively remove sulfate ions present in seawater

CSM®

APPLICATION DATA:

Operating Limits

· Max. Pressure Drop / Element	15 psi (0.1 MPa)
· Max. Pressure Drop / 240" Vessel	60 psi (0.41 Mpa)
· Max. Operating Pressure	600 psi (4.14 MPa)
· Max. Feed Flow Rate	18 gpm (4.09 m ³ /hr)
· Min. Concentrate Flow Rate	4 gpm (0.91 m ³ /hr)
· Max. Operating Temperature	113 °F (45 °C)
· Operating pH Range	3.0–10.0
· CIP pH Range	2.0–11.0
· Max. Turbidity	1.0 NTU
· Max. SDI (15 min)	5.0
· Max. Chlorine Concentration	< 0.1 mg/L

Design Guidelines for Various Water Sources

· Wastewater Conventional (SDI < 5)	8–12 gfd
· Wastewater Pretreated by UF/MF (SDI < 3)	10–14 gfd
· Seawater, Open Intake (SDI < 5)	7–10 gfd
· Seawater, Beach Well (SDI < 3)	8–12 gfd
· Surface Water (SDI < 5)	12–16 gfd
· Surface Water (SDI < 3)	13–17 gfd
· Well water (SDI < 3)	13–17 gfd
· RO permeate (SDI < 1)	21–30 gfd

Saturation Limits (Using Antiscalants)[†]

· Langlier Saturation Index (LSI)	<+1.5
· Stiff and Davis Saturation Index (SDSI)	<+0.5
· CaSO ₄	230% saturation
· SrSO ₄	800% saturation
· BaSO ₄	6,000% saturation
· SiO ₂	100% saturation

[†]The above saturation limits are typically accepted by proprietary antiscalant manufacturers. It is the user's responsibility to ensure proper chemical(s) and concentration are dosed ahead of the membrane system to prevent scale formation anywhere within the membrane system. Membrane elements fouled or damaged due to scale formation are not covered by the limited warranty.

GENERAL HANDLING PROCEDURES

- Elements contained in the boxes must be kept dry at room temperature (7–32°C; 40–95°F) and should not be stored in direct sunlight.
- Permeate from the first hour of operation should be discarded to flush out the preservative solution.
- Used elements should be immersed in a preservative solution during storage, shipping and system shutdowns to prevent biological growth and freezing. The standard storage solution contains 1% by weight sodium bisulfite or sodium metabisulfite (food grade). For short term storage (i.e. one week or less) 1% by weight sodium metabisulfite solution is adequate for preventing biological growth.
- Keep elements moist at all times after initial wetting.
- Avoid excessive pressure and flow spikes.
- Only use chemicals compatible with the membrane elements and components. Use of such chemicals may void the element limited warranty.
- Permeate pressure must always be equal or less than the feed/concentrate pressure. Damage caused by permeate back pressure voids the element limited warranty.

Toray Advanced Materials Korea Inc.

For more information on our products, company and regional contacts, please visit our website at www.csmfilter.com.

Product Specification Sheet / Model NE 4040-SRM

Page 2 of 2

Rev. 2.0 April 2021